




60-190 kW

60-318 kW

- Energy saving and compatible with environmental requirements
- Quiet in operation and designed for easy maintenance
- Reliable and trouble free
- Designed and approved in accordance with the European standard EN 676
- 1-stage, 2-stage or modulating
- Plug-in contact facilitates the installation
- Two valves, slow opening
- Hinged flange
- Gas connection left or right
- Available for natural gas, LPG, town gas, biogas
- When biogas gas is used, Bentone shall always be contacted

Type	Typ	Type	BG300	BG300-2,M	BG400	BG400-2,M
Capacity	Leistung	Débit kW	60-190	60-190	60-318	60-318
Motor	Motor	Moteur V/Hz/W	230/50-60/180		230/50-60/250	
Control unit	Feuerungsautomat	Contrôle automatique	Siemens			
Max. inlet pressure	Max. Anschlussdruck	Pression d'alimentation max	360			
Fittings	Gasarmatur	Appareillage gaz	Dungs GasMultiBloc			
Flame monitoring	Überwachung	Surveillance de flamme	Ionisation			
Air damper motor	Stellmotor	Servo moteur	•			
Ball valve	Kugelhahn	Vanne d'arrêt	•			
Pressure gauge	Manometer	Manomètre	•			
Leakage control	Dichtkontrolle	Contrôle d'étanchéité	•			
Regulator R 316	Regulator R 316	Regulator R 316	•			
Gross weight	Gewicht, brutto	Poids brut kg c.	25	27	29	32
Volume	Volumen	Volume m³c.	0,13	0,13	0,15	0,16
• Standard* Accessories/Zubehören/Accessoires						

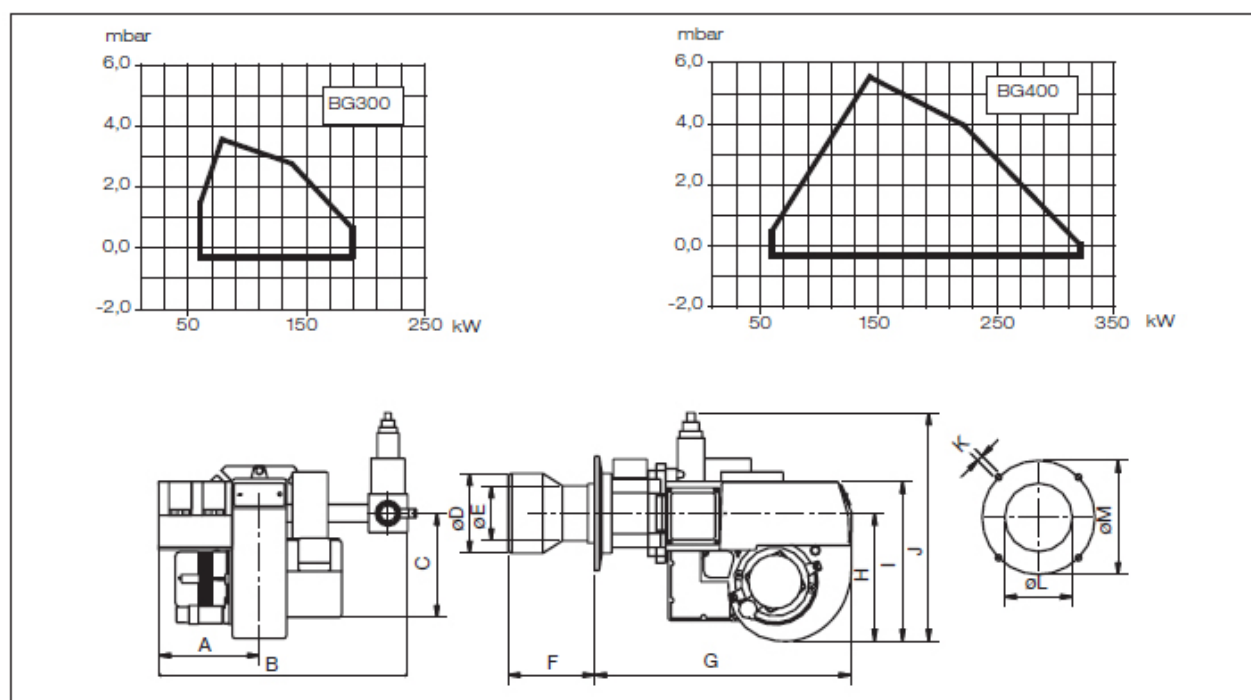

	A	B	C	øD	øE	F	G	H	I	J	K	øL	øM
BG300	175	460	115	120	89	125	472	220	275	380	M10	120	175-240
BG300-2/BG300M	182	470	115	120	89	125	472	220	275	475	M10	120	175-240
BG400	195	506	222	140	100	155	510	250	304	410	M10	140	175-240
BG400-2/BG400M	195	506	222	140	100	155	510	250	304	505	M10	140	175-240
Town gas Stadtgas gaz de ville							155					140	

Available with a 100 mm longer blast tube
 Mit einem um 100 mm längeren Brennerrohr erhältlich
 Peut être livré avec un tube diffuseur plus long de 100 mm.