

Bentone BG700

300-1650 kW






Gas Burner

- Energy saving and compatible with environmental requirements
- Quiet in operation and designed for easy maintenance
- Reliable and trouble free
- Designed and approved in accordance with the European standard EN 676
- 2-stage or modulating
- Plug-in contact facilitates the installation
- Two valves, slow opening
- Gas connection left or right
- Available for natural gas, LPG town gas, biogas
- When biogas is used, Bentone shall always be contacted

Type	Typ	Type		BG700	
BG700	Natural Gas, Erdgas, gaz naturel **		kW	300-1500	
BG700	LPG, Flüssiggas, GPL ***		kW	380-1650	
BG800	Natural Gas, Erdgas, gaz naturel		kW		
Motor	Motor	Moteur	V/Hz/W	400/50/3000	
Control unit	Feuerungsautomat	Contrôle automatique			Siemens
Air damper motor	Stellmotor	Servo moteur			*
Max. inlet pressure	Max. Anschlussdruck	Pression d'alimentation	mbar		360
Fittings	Gasarmatur	Appareillage gaz			Dungs GasMultBloc
Flame monitoring	Überwachung	Surveillance			ionisation
Ball valve	Kugelhahn	Vanne d'arrêt			*
Pressure gauge	Manometer	Manomètre			*
Leakage control	Dichtkontrolle	Contrôle d'étanchéité			*
Regulator R 316	Regulator R 316	Regulator R 316			*
Gross weight	Gewicht, brutto	Poids brut	kg c.	167	
Volume	Volumen	Volume	m ³ c.		1,2

* Standard * Accessories/Zubehören/Accessoires

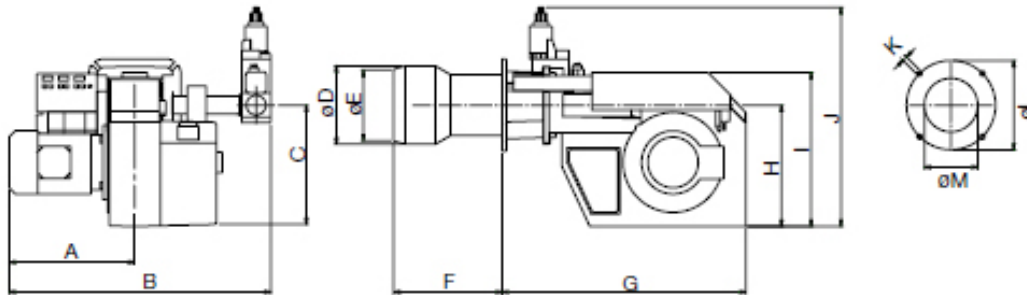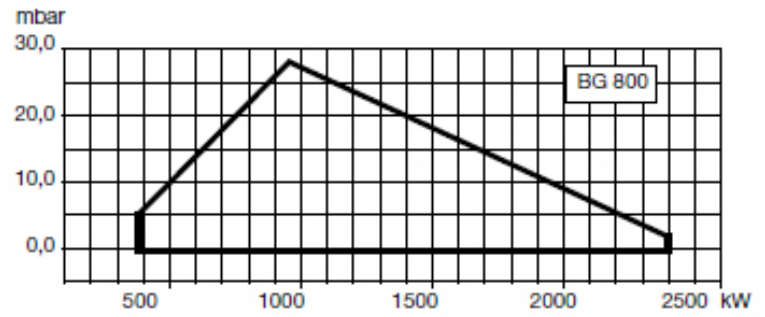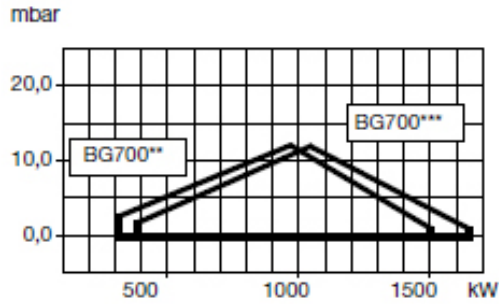

	A	B	C	øD	øE	F	G	H	I	J	K	øL	øM
BG700	425	935	403	230	199	328	820	403	513	781	M14	320-380	206
BG800	435	950	403	261	206	361	820	403	513	781	M14	320-380	206

Available with a 300 mm longer blast tube.

Mit einem um 300 mm längeren Brennerrohr erhältlich.

Peut être livré avec un tube diffuseur plus long de 300 mm.